

# CEL FI RS2 Multi-Carrier Cellular Indoor Coverage

## The Next Generation...



Nextivity's second generation Cel-Fi RS-2 is a cost-effective and intelligent Indoor Coverage Solution for WCDMA/HSPA+, designed to dramatically increase indoor voice quality and data throughput for 3G consumers while significantly improving network capacity for Mobile Operators, Small Businesses and MVNOs.

Breakthrough, patented technology enables a wireless, indoor, plug-and-play, user installable coverage solution that's so "no-touch" easy to use it obviates the need for support calls to the Operator's Help Desk.

## BENEFIT TO CONSUMERS

**Improved Voice Coverage:** Enables clear and reliable 3G voice connections within the coverage area — usually up to 1235 m<sup>2</sup> (13,000 Sq. Ft.).

**Improved Data Throughput:** For indoor areas with poor reception, Cel-Fi offers significant data throughput improvements — often in excess of four times the current rate!

**Improved Battery Life:** Cel-Fi manages the power levels between the cell tower and user devices so that subscriber devices enjoy significant improvements in battery life.

**Ease of Installation:** Cel-Fi is a true "Plug and Play" system that doesn't require the installation of external antennas, bulky coaxial cables or a configuration set-up by the subscriber. In fact, Cel-Fi intelligently and automatically senses and adapts to its environment — including changes made by the Operator or those caused by nearby user equipment like WiFi, or other Cel-Fi devices.

## BENEFIT TO OPERATORS

### Reduced Churn:

Fewer dropped calls and higher data rates help ensure customer retention.

### Higher Data Service Usage:

By supporting advanced multi-carrier features, the second generation Cel-Fi system ensures that customers can maximize their data rates.

### Decreased Operational Cost:

Lowers cost of indoor coverage and increases capacity of 3G networks.

### Network Safe:

Cel-Fi's embedded System-On-a-Chip technology provides real-time and automatic end-to-end gain control, thus guaranteeing it will complement the existing macro network's capabilities.

### Operator Specific:

Cel-Fi's On-Board IntelliBoost processor securely manages the enhanced services only for the Operator who authorized the system.

### Self Adjusting:

Cel-Fi automatically selects the correct frequencies for use based on UARFCN and Operator PLMNID codes, thereby eliminating additional and costly Operator provisioning efforts.

### Multi Carrier Support:

The Cel-Fi RS2 system supports multiple carriers (up to three simultaneous) across two bands.




## Cel-Fi Features

- Fully wireless, plug-and-play architecture for supporting band I and VIII or band II and V—WCDMA/HSPA+ with up to 100dB of system gain.
- Patented 2-unit, 3-hop system allows flexible placement for optimal coverage.
- Processor running advanced digital echo cancellation and channel select filtering algorithm.
- Software-based optimization of integrated antenna coverage pattern which maximizes system gain and provides improved coverage and signal quality.
- Automatic Gain Control (AGC) continuously monitors system path loss and transmit power to deliver maximum gain.
- Intuitive LED User Interface (UI) allows quick and easy installation by end-user.

## Network-Safe Features

- Securely provisioned operation with ciphered software which only operates on authorized Operator's network.
- Network-Safe software prevents uplink system gain from exceeding path loss, and eliminates unnecessary rise in base station noise level.
- Uplink Muting Mode automatically shuts down uplink cellular transmissions when no active user equipment is detected.
- Embedded software ensures optimal performance and prevents out-of-specification operation.
- System shuts down upon Operator's network command or failure detection.
- Maintains end-to-end cellular communication encryption without additional risk of vulnerability.
- Peaceful coexistence with adjacent Cel-Fi systems, 802.11a/b/g/n, cellular, and femtocell devices.

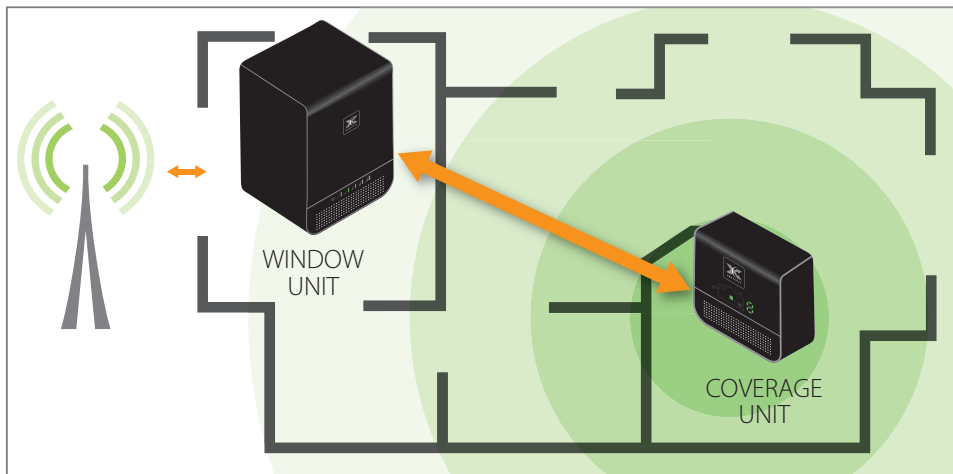

## Processor

- Nextivity's IntelliBoost Baseband Processor II

## High-Level Specifications

- Support for 3GPP Rel. 8 features
- 5 GHz link compliant with ETSI EN301 893 V1.5.1
- Up to 100dB path loss between units (approx. 20 meters between WU and CU)
- Max EIRP: 14.7 dBm (max 3 carriers) downlink & 25.7dBm (max three carriers) uplink
- Up to 100 dB system gain
- Availability greater than 99.9%

## Specifications

### WINDOW UNIT

199MM (7.83")H  
144MM (5.67")W  
147MM (5.79")D  
Weight: 0.86kg (1.9lbs.)

### COVERAGE UNIT

158.5MM (6.24")H  
146MM (5.75")W  
59MM (2.32")D  
Weight: 0.39kg (.81lbs.)

### ENVIRONMENT

- Operating temperature: 0° to 40°C
- Storage temperature: -25° to 60°C
- Relative humidity: 5 to 95%, noncondensing
- Operating altitude: -60m to 3,050m
- Storage altitude: 12,000m
- RoHS (2002/95/EC) six of six compliant
- WEEE (2002/96/EC)

### 3GPP COMPLIANCE

- 3GPP TS 25.143 Rel.8

### SAFETY

- EN60950-1:2005 +A1:2010
- EN62311:2008 1999/519/EC EMF
- UL/CS 60950-1 2005 2nd ED

### EMC/EMI/IMMUNITY

- EN55022 Class B
- EN61000-3-2, 3
- EN61000-4-2~6,11
- EN 301 489 -1,17, 23
- EN 301 893 V1.5.1
- EN 301 908-1,11

### POWER

- 12 VDC via external supply (2 included)
- External supply: 100 to 240 VAC, 47 – 63 Hz.
- Power consumption less than 17W per unit

### CERTIFICATIONS

- CE Mark
- CB Mark
- UL Mark (RS225)



### U.S. Headquarters: Nextivity Inc.

12230 World Trade Drive, Suite 250  
San Diego, CA 92128, USA  
+1 858.485.9442 tel  
+1 858.485.9445 fax

### United Kingdom

Regus Building  
Windmill Hill Business Park  
Swindon, UK, SN5 6QR

[info@nextivityinc.com](mailto:info@nextivityinc.com)